
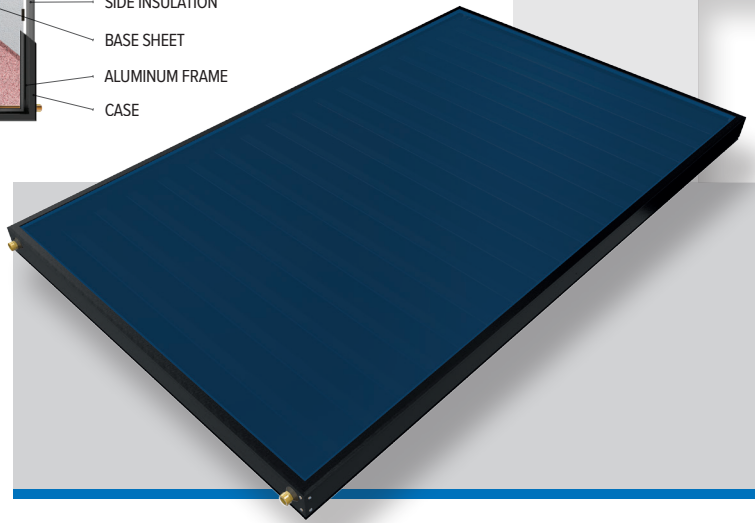


## WUNDER CLS HORIZONTAL

Solar Keymark certified  
Almeco-Tinox highly selective copper  
Rock wool insulation  
Copper pipe  
Ultrasonic welding  
Low iron tempered glass  
Horizontal system  
10 years warranty

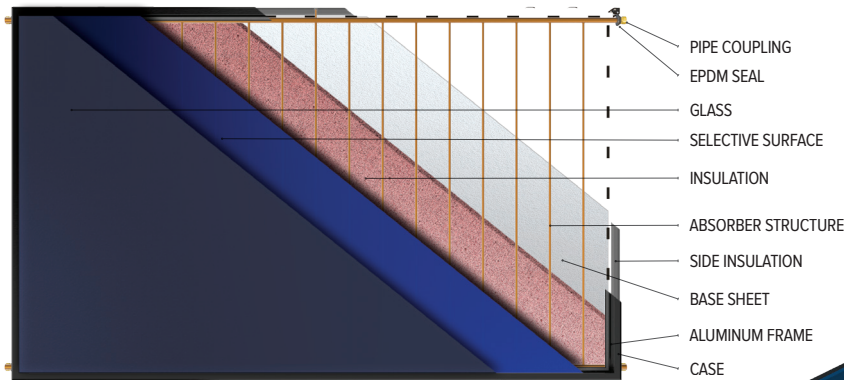

## TECHNICAL SPECIFICATIONS

		Wunder CLS 2510 Horizontal	Wunder CLS 2108 Horizontal
	<b>PRODUCT CODE</b>	<b>MA- 0105</b>	<b>MA- 0096</b>
<b>TECHNICAL DATA</b>	DIMENSIONS (mm)	1218x1988x90	1041x1988x90
	CASING	Electrostatic Painted Aluminum Case	Electrostatic Painted Aluminum Case
	WEIGHT (kg)	44	37,2
	GROSS AREA (m <sup>2</sup> )	2,42	2,07
	APERTURE AREA (m <sup>2</sup> )	2,24	1,92
	ABSORBER AREA (m <sup>2</sup> )	2,23	1,89
<b>ABSORBER</b>	ABSORBER MATERIAL	Almeco-Tinox Highly Selective Copper	Almeco-Tinox Highly Selective Copper
	ABSORPTANCE / EMITTANCE	0,95 / 0,03	0,95 / 0,03
	WELDING METHOD	Ultrasonic Welding	Ultrasonic Welding
<b>COPPER TUBES</b>	HEAT CARRIER VOLUME (lt)	1,88	1,6
	DIAMETER OF ABSORBER TUBE / HEADER TUBE (mm)	8 / 18	8 / 18
	NUMBER OF TUBE	17	17
<b>GLASS</b>	GLASS MATERIAL	Low Iron Tempered Glass	Low Iron Tempered Glass
	THICKNESS OF GLASS (mm)	4	4
<b>INSULATION</b>	INSULATION MATERIAL	Rock Wool	Rock Wool
	DENSITY OF WOOL (kg/ m <sup>3</sup> ) / THICKNESS OF WOOL (mm)	50 / 40	50 / 40
<b>MAXIMUM RATING</b>	STAGNATION TEMPERATURE (°C)	232	232
	MAXIMUM OPERATION PRESSURE (bar)	8,6	8,6
	NOMINAL FLOW RATE (lt/ h)	120	105
	BASE SHEETING	Embossed- Finished Aluminum Sheet	Embossed- Finished Aluminum Sheet
	MOUNTING TYPE	Inroof- Onroof- Flat Roof	Inroof- Onroof- Flat Roof